

Pointman

TD Card Dispenser

TD-1000

- High speed dispensing
- Supports various card types
- Hopper capacity – 150, 300 or 500 cards
- Robust metal construction
- RF encoding of ISO 14443 Mifare, Type A, B, ISO05693
- RS232 or USB interface

TD-3X00

- High speed dispensing with dual series structure
- Support various card types
- Hopper capacity – 150, 300 or 500 cards
- Sequential card dispensing for continuous operation
- Compatible with card reader, write, printer and ticket issuing unit
- RS232 or USB interface

Distributed by:


TD-1000

Dimensions (mm)	122.2 (L) x 219.7 (W) x 327 (H [REJECT BOX DEFAULT])
Printing Speed	0.5 ~ 1.0 Sec/Card
Interface	RS-232C, USB 2.0
Stacker	Max 300 pcs
Card Thickness	0.2mm ~ 1.2mm
Card Size	Width 54.0mm x Length 85.50mm
Card Method	Near-End, End Check function
Power	DC 24v (+/- 10%)
Others	Reject Box Embedded (Removable)
	RF Card Encoder
	Stacker Fixed Type (Not available to remove)
	No Compulsion Reject function of Card
Card Encoding / RF	Frequency: 13.56MHz
	Protocol (Card Type): Mifare ISO 14443A,B, ISO 15693
Environment Conditions	Temperature & Humidity
	- Operating: 0~40°C, 20~80%RH - In Storage: 10~50°C, 20~80%RH



TD-3X00

Card Thickness	0.2mm ~ 1.0mm
Card Format	CR79 85-7mm x 52.1mm CR80 (ISO/IEC7810) 85.6mm x 54mm
Card Material	PVC, PET
Hopper Capacity	150, 300 or 500 cards (6 or 8 tray dispenser up to 300 cards)
Card Capture function	Retract uncollected cards, Retain an error card
Card Dispensing	0.6 ~ 1.0 sec/card
Card Quantity Check	Card near end warning / Empty card hopper error
Interface	RS232C or USB
Power	24V, 5A
Temperature	Operating: 5°C ~ 40°C Storage: -10°C ~ 60°C
	Humidity
Dimensions (WxLxH)	TD3200 (2 Tray): 212 x 210 x 296cm (150 cap. Hopper)
	TD3300 (3 Tray): 289 x 210 x 296cm (150 cap. Hopper)
	TD3400 (4 Tray): 212 x 322 x 296cm (150 cap. Hopper)
	TD3800 (8 Tray): 366 x 322 x 296cm (150 cap. Hopper)

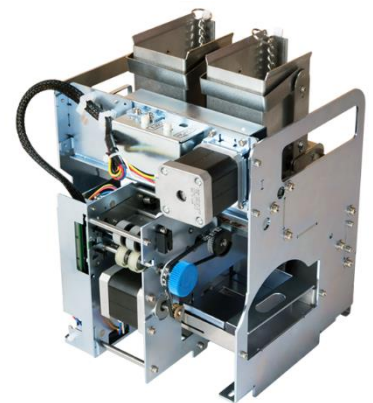

Distributed by: